



2 point-aluminium-track with L-profile



2 point-aluminium-track with U-profile




2 point-aluminium-track with 2 point-carrier



Glass partition walls on a look technical characteristics

Type G3000

suspension brackets	2 point		
Track type	36		
On hanging profiles	L/T/U-Profile		
Park systems	see architect stewards track systems, sheet 10-13		
Glass type	security glass		
Glass thickness in mm	8	10	12
Glass height up to:	2500 mm	3000 mm	3400 mm
	on enquiry		
Element breadth in mm	610 ... 1220		
Pivot panel	Installation next to every fixed area and at the beginning and end of the partition wall		
Gateway breadth in mm	1220		
movable gateway door	consisting of door element and anchor element		
Door element breadth in mm	840...920		
Anchor element breadth in mm	Door + 305...1220		
ESG Breadth height relationship	01:10		
dB	without soundproofing		
upper gap	20 mm		
lower gap	15 mm		
Brush seals	additional component		
Locking elements	by locking in the floor and with each other		
Profile color	your choice		
Handle	your choice		

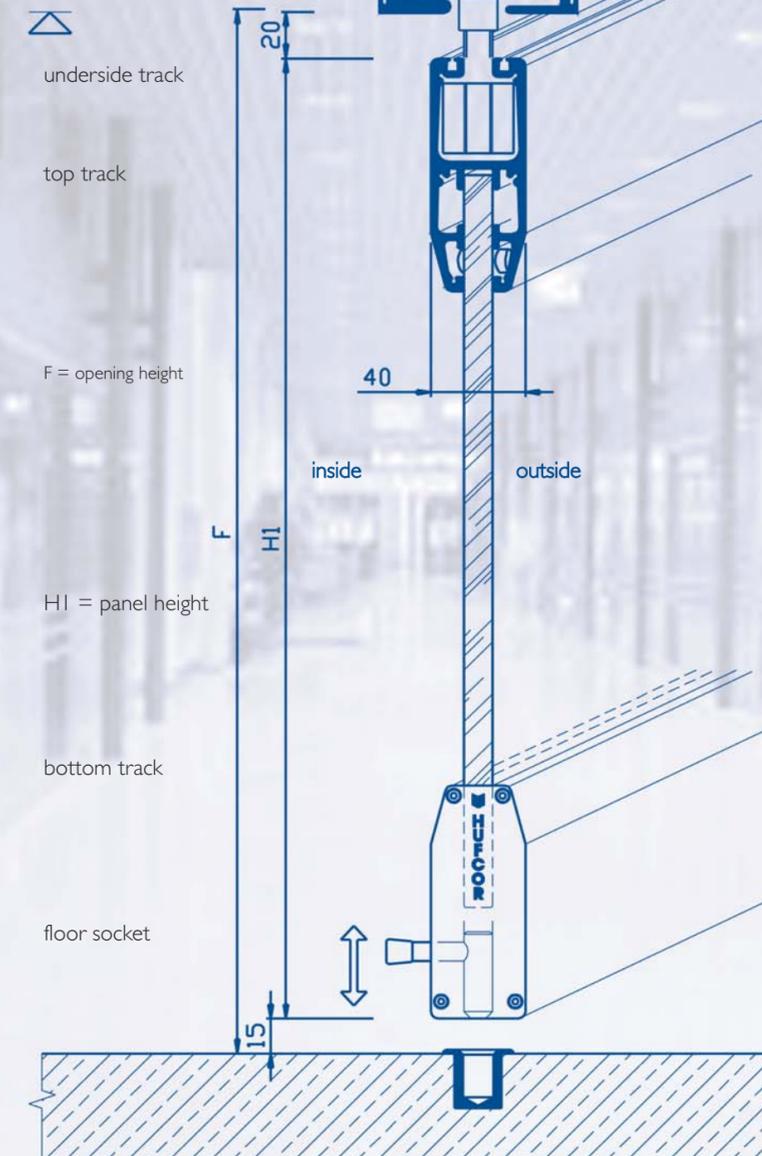

Moveable dividing walls of the type G 3000 are extremely versatile when used in today's modern & demanding architectural situations.

They create transparency and allow entry of natural light in shopping centres, entertainment centres, bank foyers, hotels and restaurants.

There is the possibility and create separate spaces that at the same time give the effect of generous, broad areas.

Moveable glass dividing walls are at home in nearly every situation.